CC Technical Documentation
RM-11 Series Transceivers

Service Tools

Issue 1 02/2004
Confidential ©2004 Nokia Corporation

Contents Page

Model 3205 Service Tools 3
Flashing and Testing Setups 8
Flashing, Testing, and Tuning with Covers On 8
Service Setup 1 9
Service Setup 2 10
Service Setup 3 11
Automated Tuning and Alignment 12
GPS Testing Engine 13
GPS Testing Equipment 14

©2004 Nokia Corporation Confidential

Model 3205 Service Tools

JBV-1 Docking Station	DA-12 Docking Station Adapter
0770298	0770603
	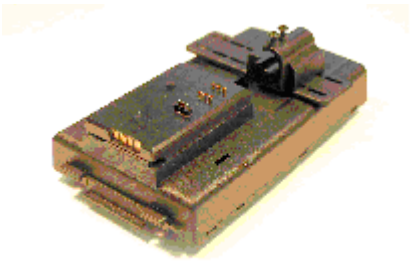
The Docking Station and the Docking Station Adapter are needed for Mbus, Fbus, RF, and audio connections. This setup allows connection between flash prommers. The Docking Station can be powered by FPS-8 or external power supply.	The flash adapter allows FBUS/MBUS connections for flashing.

JBA-12 Audio Box	CPL-8 GPS/RF Coupler
0770536	0770475
	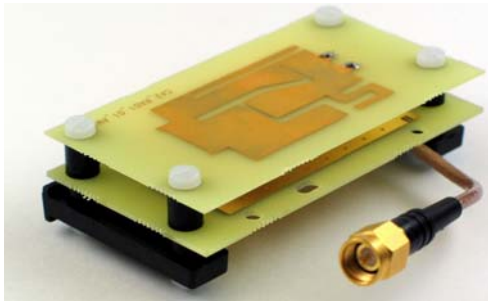
The JBA-12 is required for audio testing at authorized service centers.	CPL-8 allows testing of the GPS antenna at AMS locations. *Shield Box JSX-1A is required.*

©2004 Nokia Corporation Confidential

JSX-1A Shield Box	DKU-5F Flash Cable
0770346	0780738
The Shield Box allows RF radiated tests and antenna testing. Contact the Americas AMS in Melbourne, FL for more information on how to obtain one.	For use with the Spirent UPST and UMPP service software. *Note: The cable cannot be used as a straight through USB connection cable.*

FPS-8 Flash Prommer	ADS-8 Audio Cable
0080321	0730268
The Flash Prommer FPS-8 is used for heavy flash at authorized service centers.	The Audio Cable connects to the Audio Box (JBA-12).

©2004 Nokia Corporation Confidential

XCS-4 Mbus/Fbus Cable	CA-5S DC Service Cable
0730178	0730283
XCS-4 Service Cable is a modular cable for flashing DCT4 products.	The DC Service Cable (CA-5S) connects the docking station (JBV-1) to the charger connection (Vin) of the phone to conduct EM calibration. *Note: CA-5S replaces the SCB-3 cable (0730114).*

PCS-1 Power Cable	XRS-6 RF Cable
0730012	0730231
The PCS-1 Power Cable is used to connect the service tools (JBV-1, DA-12) to an external power supply.	The XRS-6 Cable is used to connect service tools to RF measuring equipment.

©2004 Nokia Corporation Confidential

FLS-4S POS Flash Dongle	DAU-9T FBUS Data Cable
0080543	0730267
The Point of Sale (POS) flash is a low-cost software upgrade tool. This requires XCS-1 cable and ACF-8 for operation.	FBUS cable DAU-9T provides a connection from the serial port of the computer to the system connector of the phone.

DAU-9S Cable	CA-25RS RF Test Probe
0730108	0730316
This is a general-purpose cable to support F / MBUS communication between a Mod-10 device and a PC.	The CA-25RS allows testing of the CDMA RF.

©2004 Nokia Corporation Confidential

CA-22DS Service Connector	MJ-18 Module Jig
0730311	0770599
This cable is used with FLS-4S or FLC-20 for bottom-connector flashing.	This jig allows phone PWB-level service and trouble-shooting for authorized service centers.

PKD-1 SW Security Device	SRT-10 Camera Removal Tool
0750018	0770666
SW security device (PKD-1) is a hardware device that, when connected to the parallel (LPT) port of the PC, enables the use of service software. Without the dongle present, it is not possible to use the service software. Printers or other peripheral devices can be connected to the PC through the dongle, if needed. *Caution: Make sure that you have switched off the PC and the printer before making connections!*	SRT-10 is used to remove the camera. For detailed camera module disassembly/assembly instructions, see the *Disassembly/Assembly* chapter.

©2004 Nokia Corporation Confidential

Flashing and Testing Setups

POS Flash Setup 1	POS Flash Setup 2
FLC-20 and CA-22DS	DKU-5F

POS Flash Setup 3	Service Center Flash Setup 4
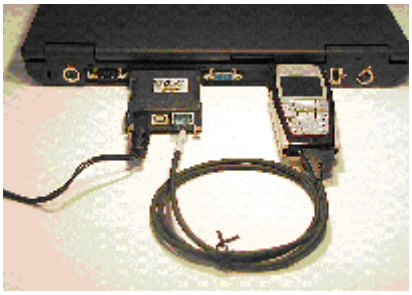	
FLS-4S and CA-22DS	FPS-8 prommer, JBV-1, and DA-12

Flashing, Testing, and Tuning with Covers On

Tightened performance specifications require more precise equipment and methods for testing and alignment. Manual tuning ca not provide accurate results for the RM-11, which means that this test has to be automated.

These setups are intended to be with the Phoenix Service Software. Both manual testing and automated tuning are permitted with Phoenix Service Software.

©2004 Nokia Corporation Confidential

Service Setup 1

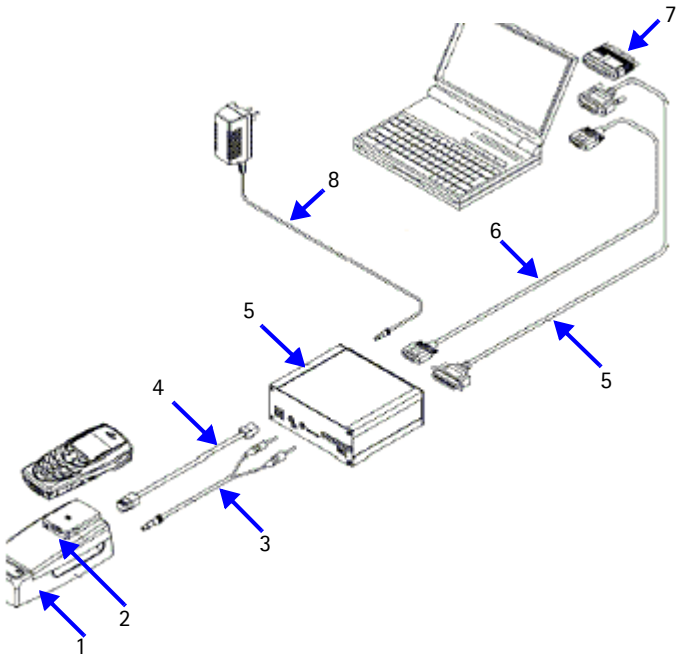

Item	Name	Type	Code
1	Docking Station	JBV-1	0770298
2	Docking Station Adapter	DA-12	0770603
3	DC Power Cable	PCS-1	0770012
4	Modular Cable	XCS-4	0730178
5	Flash Prommer Box	FPS-8	0080321
6	Printer Cable (included with FPS-8)	CA-10DS	0730298
7	D9-D9 Cable (included with FPS-8)	AXS-4	0730090
8	SW Protection Key	PKD-1	0750018
9	AC Charger	ACP-8F	0680032

©2004 Nokia Corporation Confidential

Service Setup 2

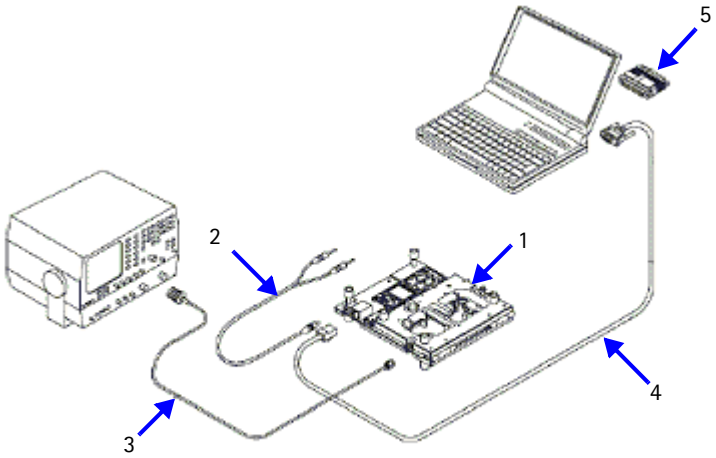

Item	Name	Type	Code
1	Module Jig	MJ-18	0770599
2	DC Power Cable	PCS-1	0730012
3	RF Antenna Cable	XRS-6	0730231
4	Service MBUS Cable	DAU-9S	0730108
5	SW Protection Key	PKD-1	0750018

©2004 Nokia Corporation Confidential

Service Setup 3

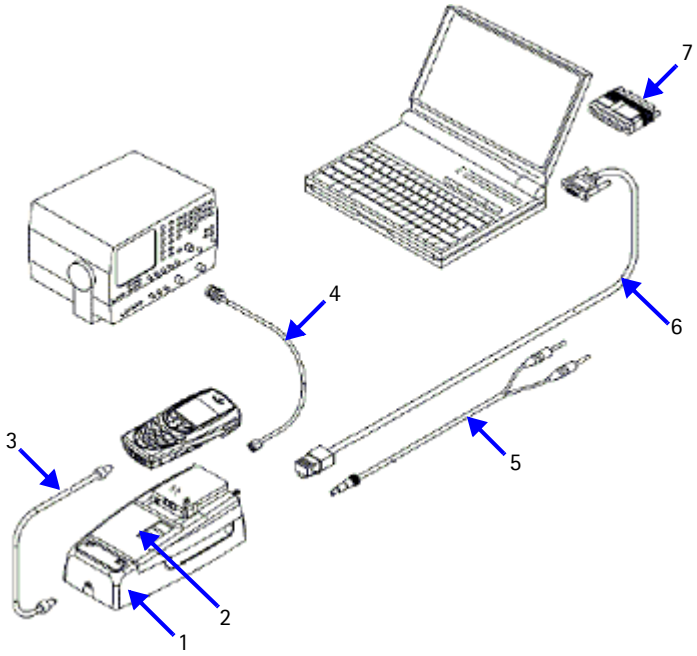

Item	Name	Type	Code
1	Docking Station	JBV-1	0770298
2	Docking Station Adapter	DA-12	0770603
3	DC Service Cable	CA-5S	0730283
4	RF Antenna Cable	XRS-6	0730231
5	DC Power Cable	PCS-1	0730012
6	Service MBUS Cable	DAU-9S	0730108
7	SW Protection Key	PKD-1	0750018

©2004 Nokia Corporation Confidential

Automated Tuning and Alignment

This setup is used for tuning of the handset at Nokia Authorized Service Centers.

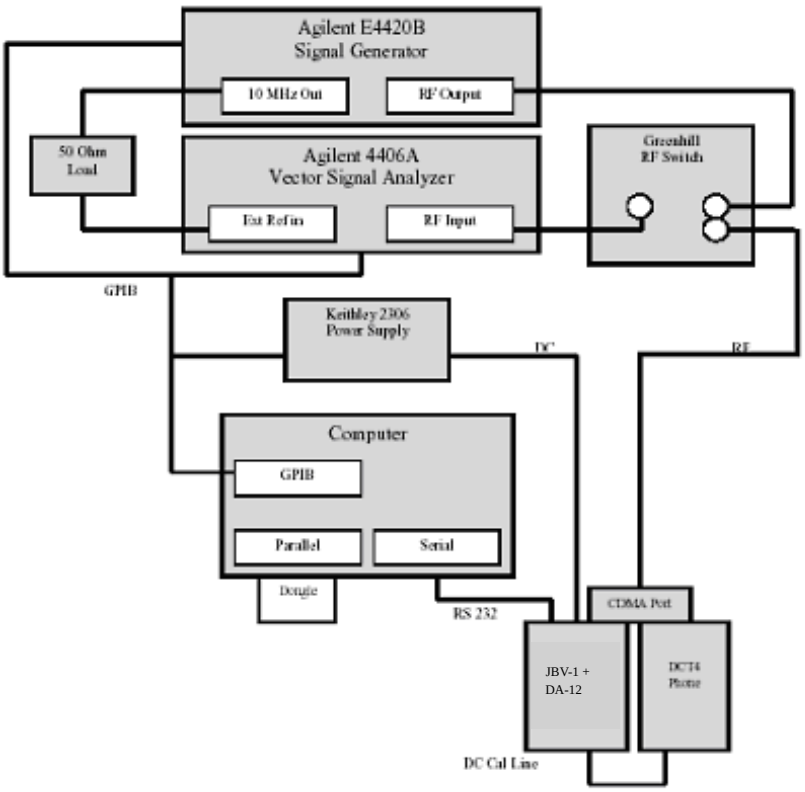

Figure 1: Tuning and alignment diagram

Use the following equipment for automated tuning and alignment.

Note: A Test Sequence File is required to perform "Auto tune" on this phone. In addition, Phoenix needs to have the Auto Tune function installed. Consult your local Nokia After Market Services office more information.

Table 1: Automated tuning and alignment equipment list

Item	Name	MFR	Model #	QTY	Comment
1	Vector Signal Analyzer	Agilent	E4406A	1	Options B78, BAC and BAE
2	Signal Generator	Agilent	E4421B	1	Digital signal generator with high stability oscillator and high spectral purity
3	Momentum Series	Agilent	8960C	1	CDMA tester for IS-95, IS-2000, and AMPS protocols
4	Power Supply	Keithly	K2306	2	Programmable with sense wire
5	Win2000 PC				Dell with Pentium III or above, network card, 256M RAM, 20GB HD, CD-ROM, etc.
6	NI-GPIB Interface	NI	GPIB-USB-A	2	USB to GPIB adapter (184983G-01)

©2004 Nokia Corporation Confidential

Table 1: Automated tuning and alignment equipment list (Continued)

Item	Name	MFR	Model #	QTY	Comment
7	Docking Station	Nokia	JBV-1	1	Consult your local Nokia After Market Services office for more information
8	RF Switches	Green Hill	TVi9901	1	Consult your local Nokia After Market Services office for more information

GPS Testing Engine

Use this setup for testing the GPS engine at Nokia Authorized Service Centers. Both Galvanic and Radiated tests are supported. The GPS Test component in Phoenix provides functionality to perform these tests. Refer to the *Troubleshooting - GPS* section for more details regarding GPS engine troubleshooting.

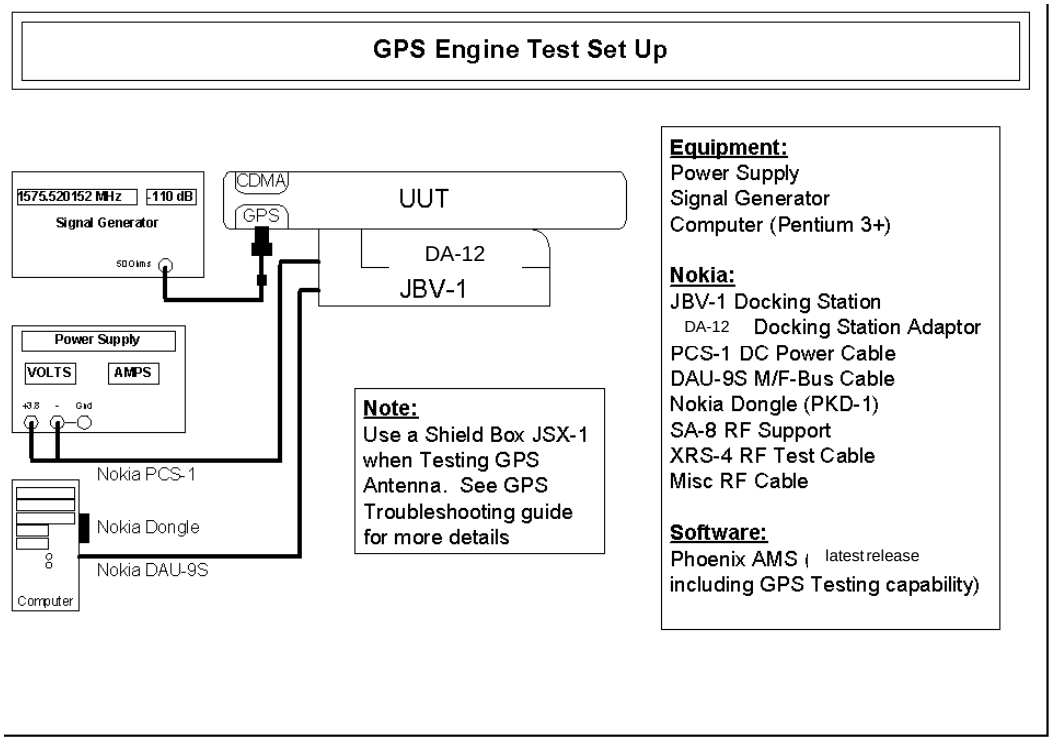

Figure 2: GPS Galvanic Testing

©2004 Nokia Corporation Confidential

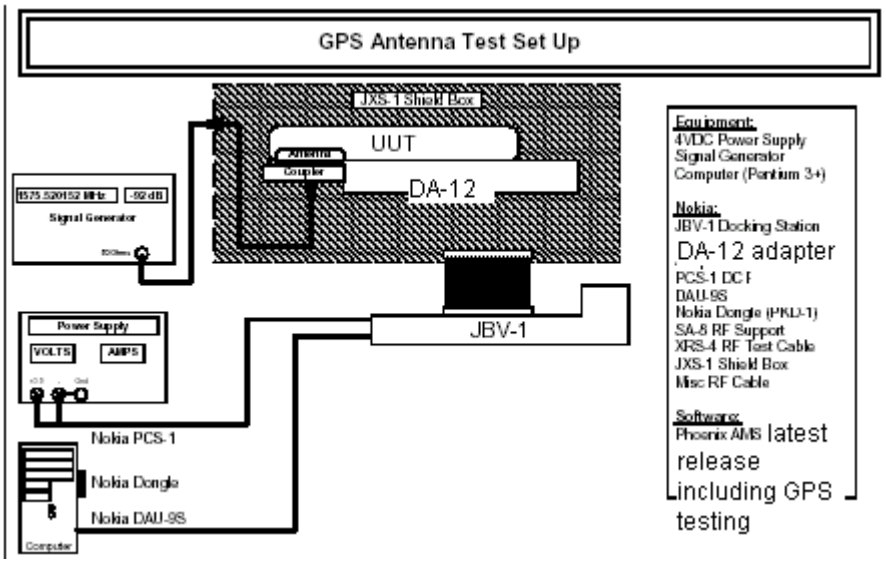

Figure 3: GPS radiated testing

GPS Testing Equipment

- Power Supply
- Signal Generator up to 2 GHz
- Computer (Pentium 3, W2000)
- JBV-1 Docking Station
- DA-12 Docking Station Adaptor
- PCS-1 DC Power Cable
- DAU-9S M/F-Bus Cable
- RF Test Cables (for GPS RF Port)
- Latest Release Phoenix AMS version w/ GPS Test Component

©2004 Nokia Corporation Confidential